






Electron /Clutch Tapping Machine & Multispindle Drilling Machine

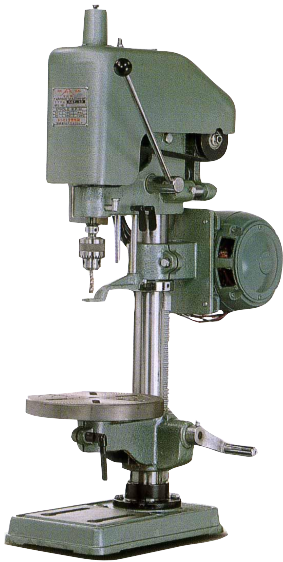

KST-10

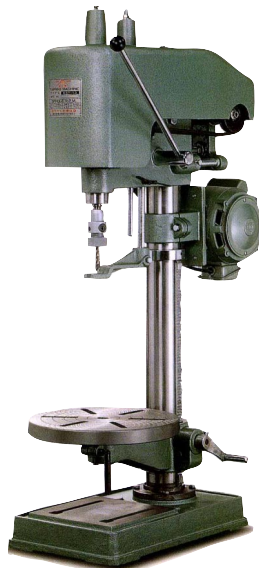

KST-13

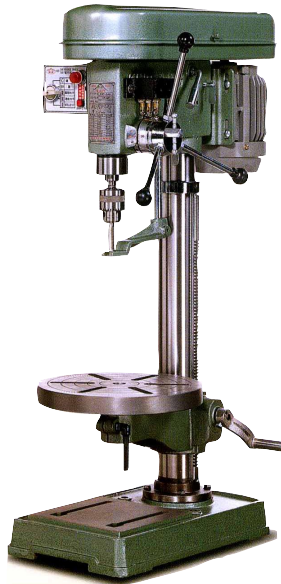

KST-340



KSD-13



KSD-16



KSD-25



KST-16



SPECIFICATIONS:

TYPE		KST-10	KST-13	KST- 340	KSD-13	KSD-16	KSD- 25	KST- 670
Dia. of spindle(mm)		∅ 15	∅ 52	∅ 65	∅ 52	∅ 65	∅ 80	∅ 80
Taper of spindle		JT2# (3/ 8)	JT6# (1/ 2)	MT2#	JT6# (1/ 2)	MT2#	MT3#	MT3#
Step of spindle(mm)		2	3	9	4	9	9	9
Spindle stroke(mm)		30	45	85	85	85	115	115
Spindle to column(mm)		126	175	175	175	175	214	214
Spindle to disc(mm)		260	460	430	430	460	660	660
Spindle to base(mm)		440	640	610	610	640	950	950
Drilling capability(mm)		---	---	3-16	3-13	3-16	6-25	6-30
Tapping capability	Steel	2-6	5-10	5-10	---	---	---	---
	Cast iron	2-10	5-13	5-13	---	---	---	---
Cover size (LxWxH)		360 x 150 x 226	530 x 215 x 255	608 x 214 x 110	608 x 214 x 110	608 x 214 x 110	727 x 255 x 137	727 x 255 x 137
Dia. of column(mm)		60	73x80	80	80	80	92	92
Dia. of disc(mm)		230	320	320	320	320	380	380
Base size(LxW)		380 x 235	500 x 300	500 x 300	500 x 300	500 x 300	615 x 385	615 x 385
Speed	50Hz	480-850	280-580	190-2300	415-2300	270-3380	170-2010	120-1390
	60Hz	580-1050	320-700	220-2800	590-2700	320-4000	200-2390	135-1570
Motor		1/4HP	1/ 2HP-4P	1/ 2HP-6P	1/ 2HP-4P	1/ 2HP-4P	1HP-4P	1HP-6P
Machine size(LxWxH)		510 x 250 x 950	610 x 310 x 1170	680 x 320 x 1085	680 x 320 x 1085	680 x 320 x 1085	780 x 380 x 1510	780 x 380 x 1510
Machine weight(kg)		60kg	110kg	100kg	90kg	95kg	154kg	157kg