




20"VS Precision Drill Press

20VS-DT




20VS-DF-PF

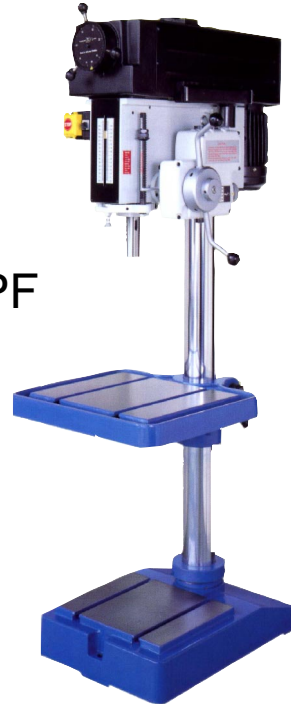

Variable Speeds Milling & Drilling Machine

28VS-DT

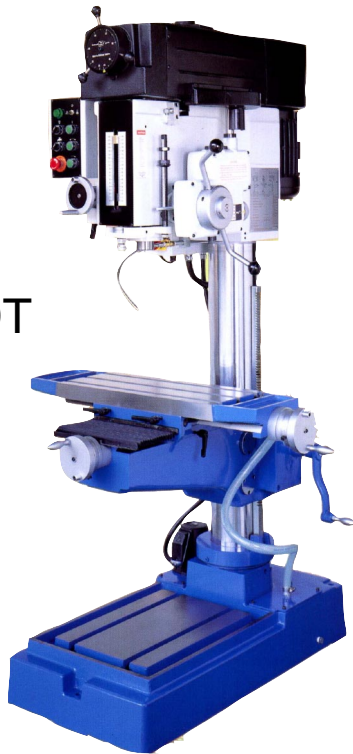

600DMT





SPECIFICATIONS:

MODEL	20VS-DT	28VS-ST	600DMT	700DMT
Drilling capacity	32mm, 1-1/4	40mm	40mm	40mm
Tapping capacity	20mm	25mm	25mm	25mm
End mill capacity	-	20mm	25mm	25mm
Face mill capacity	-	75mm	75mm	75mm
Spindle taper	MT#3(MT#4 as option)	MT#4	MT#4	MT#4
Spindle stroke	508mm	711mm	600mm	711mm
Spindle to table	165mm	175mm	140mm	140mm
Spindle to base	724mm	560mm	540mm	520mm
T-slot	988mm	1090mm	-	1090mm
X.Y. travel	16mm	16mm	16mm	16mm
Table dimension	-	220 x 270mm	220 x 470mm	220 x 270mm
Spindle rpm	559 x 495	870 x 250mm	850 x 250mm	870 x 250mm
Motor	240-1600(50HZ) 300-2000(60HZ)	120-1600(50HZ) 150-2000(60HZ)	120-1600(50HZ) 150-2000(60HZ)	120-1600(50HZ) 150-2000(60HZ)
Net weight	1-1/ 2HP 3pha 2-Speed(opt)	3HP 4/ 8p	3HP 4/ 8p	3HP 4/ 8p
Power down feed	295kgs	750kgs		
Auto tapping	0.10, 0.15 0.23, 0.30(opt)	4-speed 0.10, 0.15m/mRev 0.23, 0.3m/mRev	3-Speed 0.1/ 0.2/ 0.3 m/mRev	3-Speed 0.1/ 0.2/ 0.3 m/mRev
Auto tapping	Low voltage 24V(opt.)	Low voltage 24v controll		
Coolant system with fitting(opt.)	1/ 8HP(opt.)	1/ 8hp-3pha	1/ 8hp-3pha	1/ 8hp-3pha
Packing size	1020 x 630 x 175m/ m 40.16" x 24.8" x 68.9"	1020 x 1170 x 2160m/m 41.73" x 46.06" x 85.04"	1120 x 1170 x 2170m/ m 44.09" x 46.06" x 85.43"	1060 x 1170 x 2160m/m 41.73" x 46.06" x 85.04"

The above specification are subject to change without notice.